



# Sludge Blanket Monitoring

## Continuous Monitoring on Settlement Tanks and Clarifiers

APPLICATION NOTE

### MONITORING TECHNIQUE

Infrared Light Attenuation

### BENEFITS

Pollution Prevention  
Warning of High Blanket  
Tank Balancing during RAS Control  
Controlled Automatic De-Sludging

### PRODUCT

ASLD 2200  
Soli-Tech 20 Sensor  
Infrared Sensors

### ASSOCIATED MEASUREMENTS


Sludge Blanket Detection  
Sludge Density



Continuous monitoring of the sludge/water interface or sludge blanket is central to the efficient operation of clarifiers, thickeners and settlement tanks. Reliable measurement enables a control system to maintain the optimum depth of sludge in the tank. A sludge interface that is too high can result in pollution incidents caused by carry-over from a final settlement tank into the final effluent channel. The sludge can also become too thick to extract easily or can turn septic if left too long. If there is insufficient sludge in the tank the settlement process cannot operate correctly and the solids will tend to remain in suspension.

Historically, settlement tanks have been monitored during routine site visits using the operators judgment or a portable blanket method such as the 715 Portable Sludge Blanket Detector. This spot method of control leaves the site exposed to changes in the process that occur when the site is unattended or while the operator is busy on other work. This means that if a change happens to the site loading, the settlement tank can quickly become overloaded with sludge, or be drained of sludge entirely.

Use of Partech's Sludge Blanket monitors will enable the site operators to set maximum and minimum interface levels. The control system can then combine this with other control parameters to improve the quality of both the final effluent and the sludge that is produced.

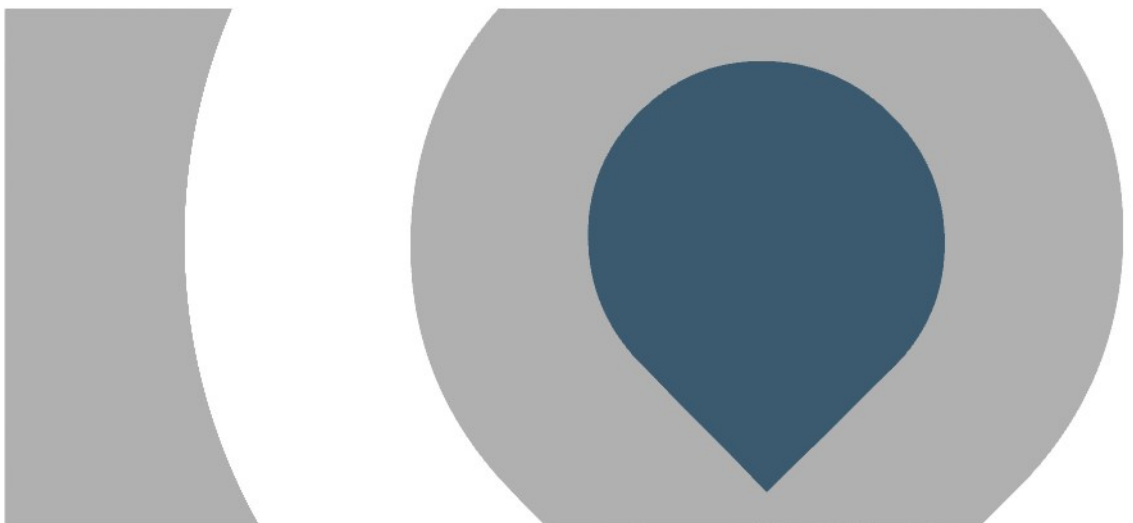

Call us on 01726 879800 [www.partech.co.uk](http://www.partech.co.uk)





# Sludge Blanket Monitoring

## Continuous Monitoring on Settlement Tanks and Clarifiers

APPLICATION NOTE



### Pre-Purchase Considerations

To ensure reliable operation of a Sludge Blanket Monitor, care must be taken to ensure that the correct sensing technique and that the correct sensor is selected. Individual product data sheets and your local Partech Sales Engineer will help with this selection.

The principle areas to consider are; type of solids or process, thickness of the sludge, clarity of the supernatant and the definition of the interface.

The size and shape of the particles in the blanket will affect the measurement being made. For infrared sensors, a thick blanket will need a narrow sensor gap while a thin blanket will need a wider gap. With Sonar Transducers a thin blanket can cause loss of echo and the instrument will default to a fault condition. Particle size will also have an effect on the sensor selection.

Another process parameter to consider is the settling characteristics of the sludge. If the interface that is produced is very well defined with thick sludge and clear supernatant the measurement is relatively straight forward, however when the interface becomes diffused then much greater care is required with the selection of the measuring device.

In addition to process considerations, the physical features of the tank and site must be taken into account. The size and shape of the tank, the presence of rotating bridges, scum boards and scrapers, will all affect the product selection.

In general on a circular tank the Sludge Blanket Monitor should be located half to two-thirds of the way from the centre to the outside of the tank. On half bridge scrapers where the bridge and scraper rotate together round the tank the sensor should be on the leading edge, ahead of disturbance caused by the scraper. Once the instrument has been installed, the signal must be transmitted to the control system. A rotating bridge can cause problems if there are insufficient slip rings to allow hard wiring. If this is the case, then Partech can offer low power radio telemetry options.

### Operational Considerations

Once the system is up and running it is important that the sensor is kept clean. The infrared sensors will need routine cleaning, typically every fortnight. This is a very quick and simple process and will easily be accommodated in any good housekeeping procedure.

### Partech's Experience

Partech have been designing, promoting and maintaining Sludge Blanket Monitors for over 40 years. This experience combined with a product range that includes portable, fixed point and continuous monitors using Infrared and Sonar technologies makes us the leading supplier in this field.

We are happy to review your application in detail and will conduct a full site survey to ensure that you can purchase the correct instrument, first time. Please call us so that we can help.

Publication No: I84350DS-Iss02  
The company reserves the right to alter the specification without prior notice. E&OE

Call us on 01726 879800 [www.partech.co.uk](http://www.partech.co.uk)

