



FlexTech Shaft

Mounting Shaft Including Flexible Coupling for OxyTechw² OPT Sensor

PRODUCT DATASHEET

COMPATIBLE SENSORS
OxyTechw² OPT

MATERIALS
Shaft – PVC
Connector – PVC
Flexible Coupling – Rubber
Cable Gland - Polyamide

SIZE
Min 0.5 metres to Max 3.0 metres
2.5 and 3.0 metres Supplied in 2 Parts
60mm OD


INCLUDES
Top Cap With Spiral Strain Relief
2" BSPF Female Thread Connector
ABS Glue

COMPATIBLE HANDRAIL BRACKET
PN 223980 – FlexTech Sensor Bracket

Order Codes

Part No	Description
224534	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 0.5m)
224535	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 1.0m)
224536	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 1.5m)
224537	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 2.0m)
224538	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 2.5m)
224539	FlexTech Shaft Assembly with Flexible Coupling (OxyTechw ² OPT, 3.0m)


Publication No: I32572DS-Iss02
The company reserves the right to alter the specification without prior notice.
E&OE. Dimensions are in mm.

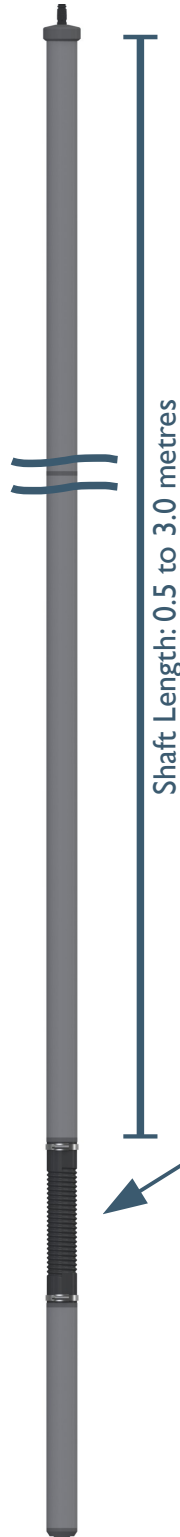

The flexible coupling is designed to allow the sensor to move in the flow, this creates a self-cleaning effect on the sensor face and ensures that rags slide off the end of the shaft and do not accumulate around the sensor. This cleaning option has no impact on energy use and does not create the additional maintenance requirement that exists with compressed air systems.

The shaft length has been limited to 3.0 metres to ensure that the sensor/shaft assembly can be safely handled. Please contact Partech for alternative solutions where the distance for the water surface to anchoring point is greater than 3.0 metres.

The shaft assembly includes an adaptor at the bottom to allow the sensor to be securely attached.

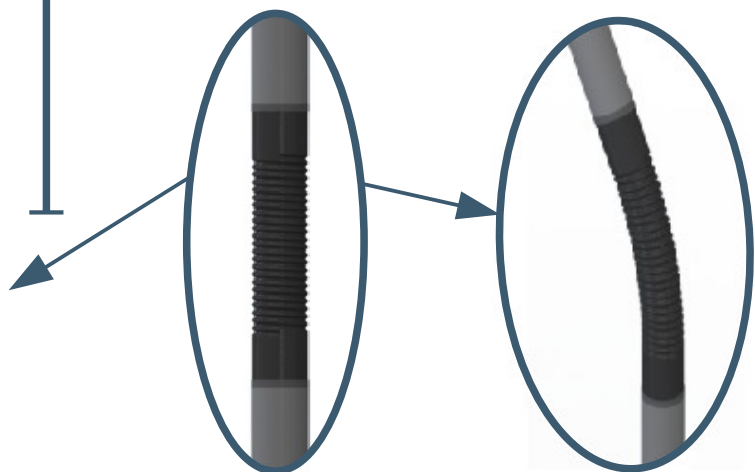

Call us on + 44(0)1726 879800 www.partech.co.uk

