



8200 Monitor

Dual Channel Monitor for Fixed Point Sludge Detection

PRODUCT DATASHEET

APPLICATIONS

- Final Settlement Tanks
- Primary Settlement Tanks
- WRc Thickeners
- Clarifiers
- Lamella Separators

FEATURES

- Simple to use
- Very Low cost of ownership
- Fault Alarm

BENEFITS

- Early Warning of Blanket Failure
- Automatic De-sludging

COMPATIBLE SENSORS


- Soli-Tech 20v2 Sensor
- Infrared Sensor



The 8200 Monitor provides a reliable method of detecting the sludge blanket in settlement tanks or increasing levels of suspended solids or sludge density in a large range of processes.

Control of the sludge blanket is essential to ensure discharge consent compliance and efficient control of the treatment process. If the blanket in a settlement tank is allowed to rise to close to the surface there is a danger that solids will leave the tank and contaminate the next process stage or be discharged into the water course. Alternatively, if the sludge blanket is not allowed to stabilise and form a blanket or is pumped out too frequently the settlement process does not take place at all and solids will remain in suspension. Additionally there is a danger that thin sludge or water will be pumped from the bottom of the tank into the sludge handling system thus reducing the effectiveness of that process.

The 8200 Monitor is suitable for mounting outdoors on the bridge of settlement tanks, the enclosure is IP65 rated and no outer enclosure is required. Provision must be made for transmission of the output signal to the control system; this is normally possible via spare slip rings. Where this is not possible a radio telemetry option is available, allowing transmission directly to the control system without the need for installation of cables.

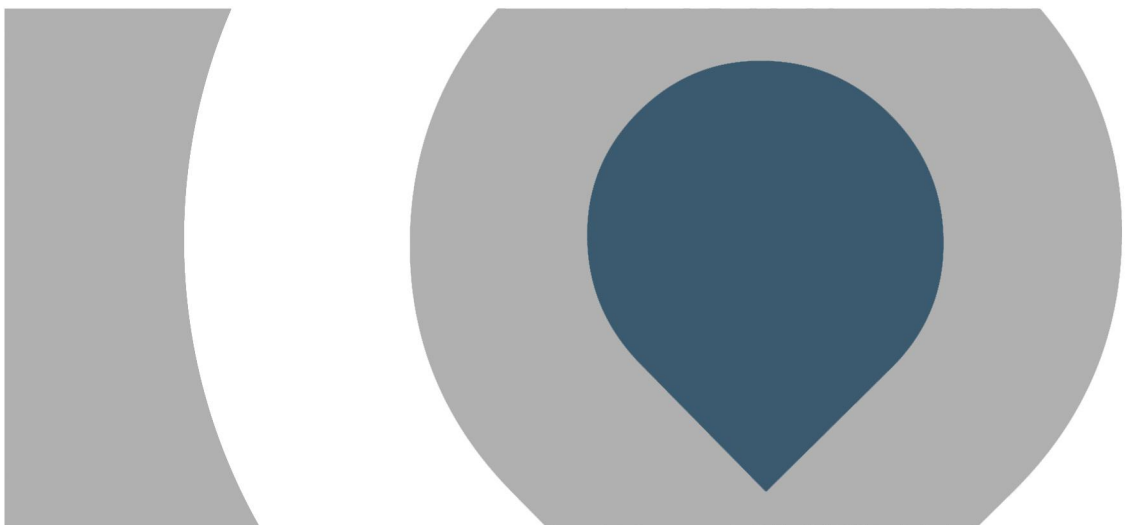

Call us on +44 (0) 1726 879800 www.partech.co.uk







8200 Monitor

Monitor for Fixed Point Sludge Detection

PRODUCT DATASHEET

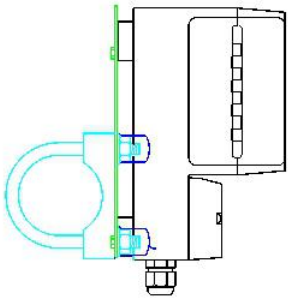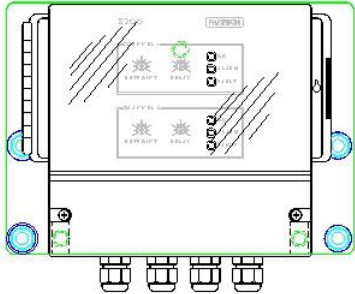

Monitor shown with mounting bracket part number 224370

Physical

Dimensions	160 x 195 x 105 mm (HxWxD)
Weight	1 kg
Protection Class	IP65
Enclosure Material	ABS
Cable Entries	4 x M20 (cable 5 to 10 mm)
Cable Size	Max Conductor Cross Section 2.5 mm ²

Environmental Data

Operating Temperature	0 to 50°C
Storage Temperature	-20 to 60°C
Location	Indoor or Outdoor

Electrical

Power Supply	100-240 VAC +10/-15% or 9-36 VDC
Power Consumption	8W
Fuse	500 mA

Measurement Details

Response Time	1 to 90 seconds
---------------	-----------------

Outputs and Set Points

Analogue Output	None
Relays	3
Contacts	SPCO
Rating	5A @ 230 VAC, 5A@125 VDC
Type	2 High Blanket Alarm, 1 Fault Alarm
Adjustment	5 - 95% Sensor Range
Local Annunciation	Green LED for Normal, Red LED for Blanket Alarm, Amber LED for Fault

Serial Communications

Profibus	Available via WAGO interface modules - PN22581 I
----------	--

User Interface

Display	3 LED's
Setup	Front Panel Trim Adjustments

Mounting

Type	Surface
Bracket/Plate	Part Number 224370 for attachment to handrail

Publication No: I84250DS-Iss05
The company reserves the right to alter the specification without prior notice. E&OE

Call us on +44 (0) 1726 879800 www.partech.co.uk

